


Universal Remote Control GDCT-ELD

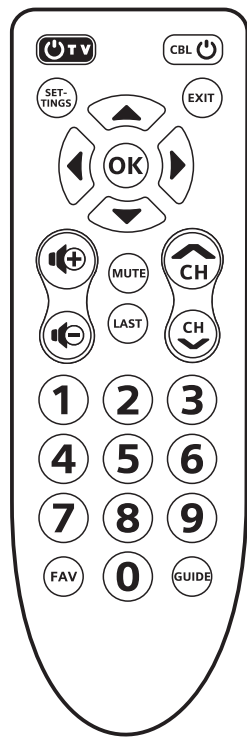


Overview

GDCT-ELD Universal Remote control is the newly designed 2in1 remote control for Elder, it allows you to control 2 devices of TV & CBL and with learning function. You can program your Remote Control to operate most models and brands of infrared remote-controlled TV's in the world, including the most updated codes for Flat Screen TV.

Battery Installation and Information

The GDCT-ELD remote control requires two AAA Batteries. To install the batteries



1. Remove the battery cover.
2. Insert the batteries, matching the batteries to the (+) and (-) marks inside the battery compartment.
3. Press and push the battery cover back into the place.

Caution:

If you do not plan to use the remote for an extended period, remove the batteries. They may leak chemicals that can destroy electronic parts.

Programming Device

» Default Setting

TV: LG
CBL: Motorola

» Code Input Setting

1. Turn on the Power of device you will be setting.
2. Locate the 4 digit code corresponding to your device in the code list.
3. Press & hold "OK" & "MUTE" buttons till the LED light up, release all buttons.
4. Input the 4 digital numbers you choose from the code list, the LED will flash one time while you input 1 digit number. The LED will light off directly to exit the setting mode if correct digital number you input.
5. If wrong code inputted, the LED will flash 3 times to exit the setting mode. Please repeat step 4 if wrong code inputted.
6. After inputting the codes, please test the remote working status on the device. If device is not controllable, please choose other 4 digital codes from the code list & repeat step 3-4 to make sure your remote workable.

Notes: If not keys pressed in 30 seconds, the LED will light off to exit the setting mode.

» Auto Searching Mode

If you could not find the correct 4 digital number after many times of code inputting, please use auto searching to locate the correct one:

1. Turn on the device you will control.
2. Press & hold "OK" & "MUTE" buttons till the LED light up, release all buttons.
3. Aim Remote to the device, press "TV POWER" or "STB POWER" key till the device turn off.
4. Please test other function keys under TV or STB working or not. If working no properly, please repeat step 1 – 3 to locate the correct codes.

Note: If not keys pressed in 30 seconds, the LED will light off to exit the setting mode.

Your Favorite

For future reference, please document the codes used to set your TV:

TV Codes

□□□□ Device Type: _____

CBL Codes

□□□□ Device Type: _____

Code Lock Function

» To Enable Code Lock

1. Press & hold "OK" & "MUTE" buttons till the LED light up,

release all buttons.

2. Input number "9-9-9-1", the LED light off to enable code lock function.

» To Release Code Lock

1. Press & hold "OK" & "MUTE" buttons till the LED light up, release all buttons.
2. Input number "9-9-9-1", the LED flashes 2 times & the code lock released.

Volume Lock Function

1. Press & hold "OK" & "V-" buttons.
2. The LED flashes 2 times to indicate the V+/V-Mute punch through to work for TV device.
3. The LED no flash to indicate the V+/V-Mute work for STB device.

Switch between Device

The default working status of remote is for STB device, by pressing & holding "OK" & "FAV" buttons, the LED will flash 2 times to switch working status between STB & TV.

Programming Learning

» How to Learn

1. Press & hold "OK" & "GUIDE" buttons till the LED light up, release all buttons
2. Press the button on the remote that will learn the code, the LED flashes one time & light up.
3. Aim the target remote at the Elder

remote (Less than 2 feet).

4. Press one effective button on the target remote, the LED flashes quickly 3 times & light up which indicate the code is successfully learned.
5. Repeat step 2-4 to learning more button codes.
6. Press "OK" & "LAST" button to exit the learning mode, or if no buttons pressed in 20 seconds, the LED will light off to exit the setting mode.

» Clear Learned Button Codes

1. Press & hold "OK" & "MUTE" buttons till the LED light up, release all buttons
2. Input the digital number "9-9-6-6" in turn, the LED will flash 2 times to indicate all learned codes been deleted.

Recall to Factory Setting

1. Press & hold "OK" & "MUTE" buttons till the LED light up, release all buttons
2. Input the 4 digital number "9-9-9-9" in turn, the LED will light off & return to factory default status.

Code List

TV

A_nity	1428 1438 1439 1445
Abex	1770
Accurian	1252
Acer	1144
Action	1078
Adentura	1740
Admiral	1012 1024 1057 1622 1682 1684 1689
Advent	1042 1048 1057 1058 1186 1282 1707
Advertura	1545
Aiko	1011
Aiwa	1154 1524 1465 1744 1747
Akai	1002 1030 1035 1044 1054 1109 1157 1215 1216 1220 1266 1284 1332 1465 1478 1573 1576 1621 1739
Alarion	1552 1744
Albatron	1034 1063
Aleron	1465
Amark	1643 1646 1581 1588
Ambassador	1550 1745
America Action	1020 1597
Ampro	1522 1664 1699
Anam	1020 1581 1582 1586 1597 1653 1669
Anam National	1708 1756 1757
Anderic	1783
Aoc	1002 1096 1155 1191 1192 1308 1314 1362 1372 1387 1436 1440 1523 1531 1560 1573 1576 1581 1739 1752
Aomni	1199
Apple	1778
Apex Digital	1041 1044 1046 1083 1086 1111 1302 1361 1453
Ascent	1481
Astar	1181 1226
Asus	1413
Audiovox	1011 1020 1023 1027 1051 1065 1079 1124 1126 1184 1241 1244

Auria	1252 1260 1263 1286 1293 1294 1320 1363 1380 1404 1530 1567 1597 1608 1759
Aventura	1314 1337
Axon	1018
Baysonic	1286
Bell&Howell	1597
BenQ	1015 1557
Blue Light	1009 1136 1461 1714
Bradford	1483 1484
Brilliant	1020 1597
Broksonic	1087
Byd.sign	1021 10241271 1284 1287 1268 1280 1603 1605 1537 1753
C & M	1134
Candle	1003 1011 1015 1023 1027 1029 1030 1210 1270 1279 1454 1530 1652 1729 1739 1746
Carnivale	1002 1739
Carver	1007 1707
Casio	1108
CCE	1027
Celera	1044
Celebrity	1000 1555
Centurion	1576
Cetronic	1597
Champion	1154
Changhong	1044
ChilMei	1498
Cineral	1759
Citizen	1002 1003 1008 1101 1213 1214 1279 1284 1545 1570 1573 1576 1589 1597 1602 1626 1629 1643 1652 1729 1739 1740 1746
Clairstone	1531 1752
Clairon	1020 1597
Claris	1442
Classic	1597
Coby	1182 1202 1339 1341 1342 1344 1346 1347 1348 1349 1350 1351 1352 1353 1354 1383 1422 1423
Commerical Solutions	1432 1433
Concerto	1011 1020 1023 1027 1051 1065 1079 1124 1126 1184 1241 1244

Contec	1020 1520 1531 1597 1701 1752 1764
Coronado	1643
Craig	1020 1419 1597 1653
Crosley	1000 1007 1707
Crown	1003 1020 1597 1643 1646
Curtis	1692 1729 1738 1744 1745 1752 1753 1762 1765
Curtis Mathes	1163 1240
Emprex	1080
Encorus	1002 1055 1155 1191 1308 1314 1739
Envision	1002 1055 1155 1191 1308 1314 1739
Epson	1098 1551
ESA	1018 1054 1289 1299 1711
Fisher	1015 1154 1565 1604 1773
Fluid	1402
Fujitsu	1032 1052 1067 1521 1552 1742 1744
Funai	1000 1018 1020 1123 1158 1267 1299 1300 1552 1577 1597 1744 1766
Funai Tv/Vcr	1618
Futuretech	1020 1597
Gateway	1234 1235
Ge	1004 1005 1019 1023 1044 1148 1166 1183 1269 1273 1465 1544 1547 1563 1576 1708 1738 1741 1751 1759 1765 1767
General Electric	1573 1594 1630 1631 1657 1661 1662 1664 1682 1683 1684 1689 1698 1729
GFM	1018 1019 1020 1024 1090 1186 1001 1002 1739 1774
Gibraltar	1256 1539
Go video	1002 1002 1019 1277 1576 1578 1579 1580 1581 1587 1635 1643 1644 1646 1528 1729 1576 1739 1738 1757 1770
Goldstar	1386 1410
GPX	1499 1501
Gradiente	1032
Grundig	1020 1552 1597 1744
Grunpity	1047 1090 1186 1231 1232 1233
Haier	1338 1340 1374 1411 1416
Hall Mark	1019 1576 1729 1738
Hanns.G	1247

1426 1426 1530 1531 1537 1550 1552 1567 1576 1576 1577 1589 1589 1594 1595 1597 1600 1601 1603 1605 1607 1608 1643 1646 1692 1729 1738 1744 1745 1752	
1753 1762 1765	
1763 1240	
1080	
1002 1055 1155 1191 1308 1314 1739	
1098 1551	
1018 1054 1289 1299 1711	
1015 1154 1565 1604 1773	
1402	
1032 1052 1067 1521 1552 1742 1744	
1000 1018 1020 1123 1158 1267 1299 1300 1552 1577 1597 1744 1766	
1020 1597	
1234 1235	
1004 1005 1019 1023 1044 1148 1166 1183 1269 1273 1465 1544 1547 1563 1576 1708 1738 1741 1751 1759 1765 1767	
1573 1594 1630 1631 1657 1661 1662 1664 1682 1683 1684 1689 1698 1729	
1018 1019 1020 1024 1090 1186 1001 1002 1739 1774	
1534 1760 1767	
1597	
1111 1248 1254 1309 1327 1000 1531 1555 1752	
1234 1199	
1024 1186 1212 1214 1608 1643 1672 1764	
1399	
1219 1264 1326 1402 1426	
1047 1090 1186 1231 1232 1233 1023 1024 1027 1158 1210 1211 1259 1264 1268 1270 1271 1272 1279 1280 1289 1299 1304 1325	

Hannspree	1149 1150 1229 1247 1397
Harley Davidson	1267 1552 1744
Harman Kardon	1007 1707
Harvad	1020 1597
Havermy	1012
Helios	1073 1538
Hello Kitty	1023
Hewlett Packard	1095 1096 1097 1174 1205
Himitsu	1597
Hisense	1041 1135 1209 1316 1326 1356 1366 1424 1780
Hitachi	1003 1013 1031 1049 1101 1147 1165 1206 1267 1395 1455 1500 1526 1527 1557 1576 1586 1604 1627 1637 1638 1639 1641 1643 1646 1691 1702 1706 1729 1762 1764 1768 1770
HP	1095 1097 1174
Hospitality	1786 1787 1788 1789 1790 1791 1792 1793 1794
Hyundai	1066 1112 1130 1418
I-Inc	1230
iLo	1121 1127 1158 1171 1197 1217
In_nity	1007
Infinity	1655 1707
Initial	1301 1197
Inkel	1670
Insighia	1018 1024 1107 1139 1157 1164 1176 1184 1204 1209 1248 1254 1265 1299 1305 1309 1315 1327 1364 1365 1368 1394 1412
Inteq	1001 1773 1774
IRIS	1329
iSymphony	1046 1406 1416
IX	1081
Janeil	1545 1740
Jbl	1007 1655 1707
Jcb	1000 1555
JCM	1329 1334
Jopenny	1573 1576 1611 1630 1631 1643 1657 1672 1684 1729
Jensen	1052 1057 1058 1132 1139 1282 1382 1411 1574 1707

JVC	1006 1024 1028 1040 1116 1195 1212 1245 1274 1335 1336 1343 1443 1444 1501 1613 1620 1636 1640 1661
Kaypani	1560
KDS	1175 1219
Kec	1020 1597
Kenwood	1002 1573 1613 1739
KLH	1044 1046
Kloss	1545 1559 1629 1740
Kmcc	1646
Kinka	1525
Kolin	1502 1503
Konka	1038 1157
Kost	1120 1173
Kreisen	1080
Ktv	1002 1003 1020 1573 1576 1589 1597 1643 1646 1660 1531 1739 1752 1756
LG	1001 1002 1019 1034 1070 1104 1122 1138 1164 1243 1283 1303 1357 1367 1398 1417 1474 1477 1482 1485 1504 1541 1570 1738 1739 1779
LiteOn	1095
Lloyd's	1267
Lodgenet	1557
Logik	1557 1768
LodgingStar	1407
Luce	1088
Luxman	1576 1729
Lxi	1004 1007 1015 1016 1019 1604 1612 1622 1645 1655 1664 1670 1576 1767 1738
Mad	1615 1645
MAG	1219 1175
Magnasonic	1272 1279
Magnavox	1002 1005 1007 1018 1037 1051 1105 1117 1155 1167 1168 1180 1234 1261 1262 1267 1272 1281 1289 1299 1301 1359 1362 1385 1400 1437 1523 1552 1559 1562 1566 1573 1576 1609 1644 1646 1651 1652 1655 1667 1684 1707

1729 1739 1741 1744 1745 1746 1769	
1269	
1557 1768 1576	
1002 1007 1036 1068 1069 1159 1167 1224 1370 1573 1576 1655 1674 1675 1707 1575 1739	
1655	
1022 1028 1457 1669	
1043 1110 1224 1234 1236	
1263	
1034	
1013 1019 1456 1588 1576 1738 1744 1768	
1531 1752	
1080	
1014 1015 1019 1024 1081 1186 1211 1212 1248 1265 1266 1271 1275 1277 1278 1287 1552 1557 1576 1604 1669 1675 1729	
1002 1014 1019 1269 1456 1573 1576 1586 1672 1675 1729 1739 1738	
1576 1577 1674 1675	
1001 1003 1004 1005 1465 1563 1570 1767 1774 1770	
1681	
1197 1301	
1544 1741	
1012 1014 1019 1062 1115 1250 1456 1529 1576 1577 1586 1621 1622 1672 1673 1675 1703 1704 1705 1706 1729 1738 1756	
1034 1063	
1557 1576 1576 1577 1610 1631 1646	
1012 1708	
1002 1008 1573 1531 1570 1626 1729 1739 1752	
1020 1597	
1016 1019 1074 1103 1576 1738 1748	
1318 1392 1408 1416	
1002 1036 1080 1159 1221 1250 1338 1505 1543 1546 1573 1576	

1586 1604 1610 1602 1680 1698 1739 1749	
1043 1234 1462	