




Wireless Cable Modem Router

Model: DDM3521




Device Front Panel

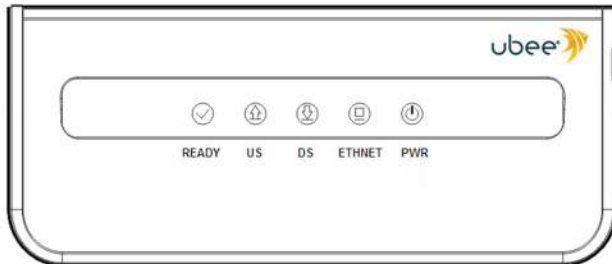

Device Rear Panel



Back Panel Label	Description
PWR	 Connects to the power adapter. WARNING: Use only the power adapter shipped with this device. Failure to do so may cause damage to the device.
ETHERNET	Connects an Ethernet device such as a computer, gaming console, or a router/hub to the Internet using a standard RJ45 Ethernet cable. See the Understanding the Customer Premises Network on page 4 for more information.
RESET	Resets the device. Insert a pointed object into the opening. Press for less than 10 seconds to power cycle the device. Press for more than 10 seconds to reset the device to the factory defaults.
CABLE	Connects to the coaxial cable (not included) that comes from the cable wall outlet or cable splitter (not included).

Steps To install the DDM3521:

1. Verify service has been activated on the provisioning system before installing at the customer premises. Contact your Network Operations Center (NOC) or headend for instructions if service activation is not completed.
2. Remove the contents from the device packaging.
3. Place the DDM3521 in an optimal location to connect to other devices, such as PCs or gaming consoles.
 - ◆ Place the device in a location that has an operating temperature of 0°C to 40°C (32°F to 104°F).
4. Power on your PC. The PC must have an Ethernet network adapter or Ethernet port and an Internet browser installed, such as Firefox or Internet Explorer. The following browsers are supported:
 - ◆ For Windows 2000, XP, Vista, Windows 7: Firefox 1.07 and higher, Internet Explorer v7 and above, Netscape.
 - ◆ For MAC OS X, 10.2, and higher: Firefox 1.07 and higher, Safari 1.x and higher.
5. Using the power supply included in the product package, connect the power cord to the **POWER** outlet on the back of the modem and connect the other end into the power outlet.
6. Using the Ethernet cable included in the product package, connect one end of the Ethernet cable to your computer's Ethernet port, and connect other end to the **ETHERNET** port on the cable modem.
7. Connect the coaxial cable from the cable wall outlet or a cable splitter connected to the cable wall outlet to the **CABLE** port on the device.

Connecting Devices to Your Network

